



# RollAStep

MOBILE ROLLING WORK PLATFORMS



**C Series**



**G Series**



**MP Series**



**TR Series**



**Designed for Work, Built for Safety.**

Zacatepetl 363 A, Delegación Tlalpan 14010  
México, D.F. Tel- +52 (55) 5606-1611, e-mail:  
promtec@promtec.com.mx

# C Series

## Cantilever Rolling Platform



42" high railing on platform and cage meet OSHA standards.

Self-supporting platform



Full-size 2" diameter handrails

### Features Fixed Platform Work Area and Single Operator Mobility

The C Series's cantilever work platform allows an operator to take a position above and/or to move onto tall industrial machinery. The steel base provides exceptional counter balance, while the lightweight aluminum upper provides single user maneuverability.

A large, six square foot work platform provides ample room for an operator as well as parts and tools. The self supporting platform extends 2'-5" feet beyond the base of the chassis, providing access while eliminating contact with the equipment being serviced.



Optional cage provides off-platform safety



Available in sizes from 8 steps to 12 steps  
See specs section for details

Brittany  
Customer Service



▲ All-weather slip-resistant tread



▲ Wheels swivel 360° for easy placement

### Built for Safety

The full size 2" diameter handrails are 42" tall around the work platform and powder coated to meet OSHA standards.


Our aggressive, self draining tread, is featured on both platforms and steps. This pattern provides safe, all weather access in both rain and snow and reduces ice build up.

### Easy to Roll

The easy steer design and large no-flat tires allow a single operator to easily roll and position the unit, even over rough ground.


The 360° swiveling wheels provide perpendicular or parallel movement and allow easy positioning. Wheels lock for stability.

For efficient longer distance moves, forklift pockets allow rapid relocation.

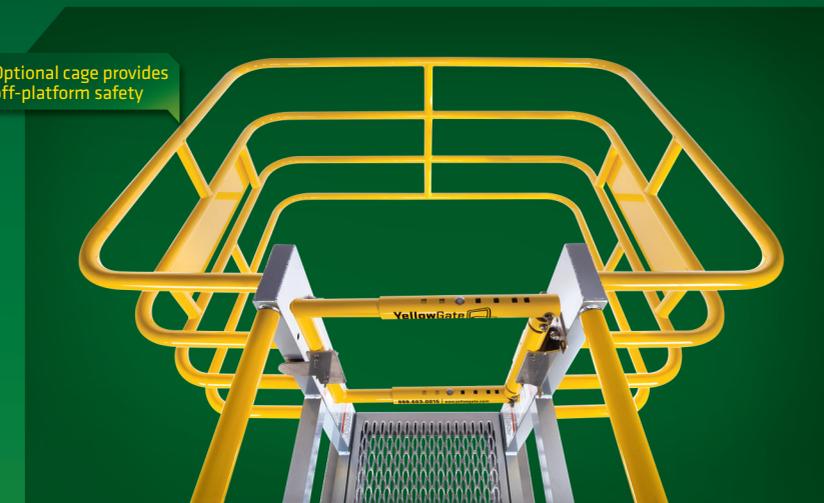

Optional cage provides off-platform safety

▲ The 24" wide by 36" long platform provides ample work area. Shown with optional YellowGate swing gate.

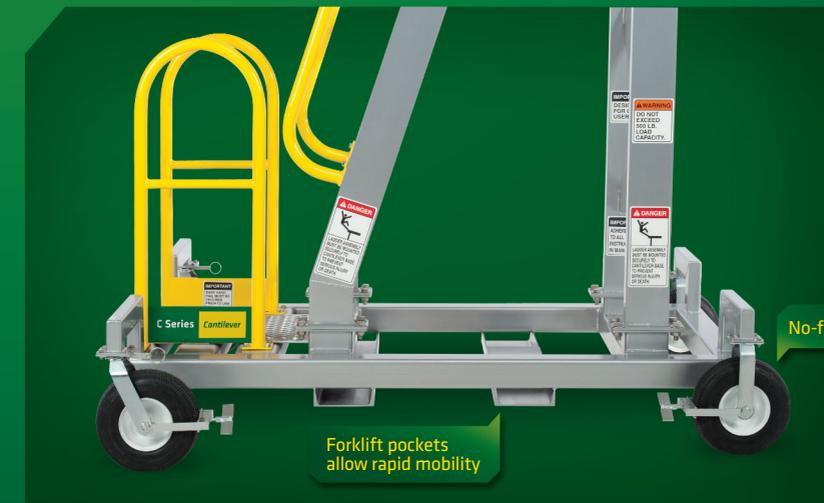


No-flat tires

Forklift pockets allow rapid mobility

▲ The heavy, galvanized steel base provides incredible stability, while large no-flat tires provide single user maneuverability.

# C Series


## Cantilever Rolling Platform

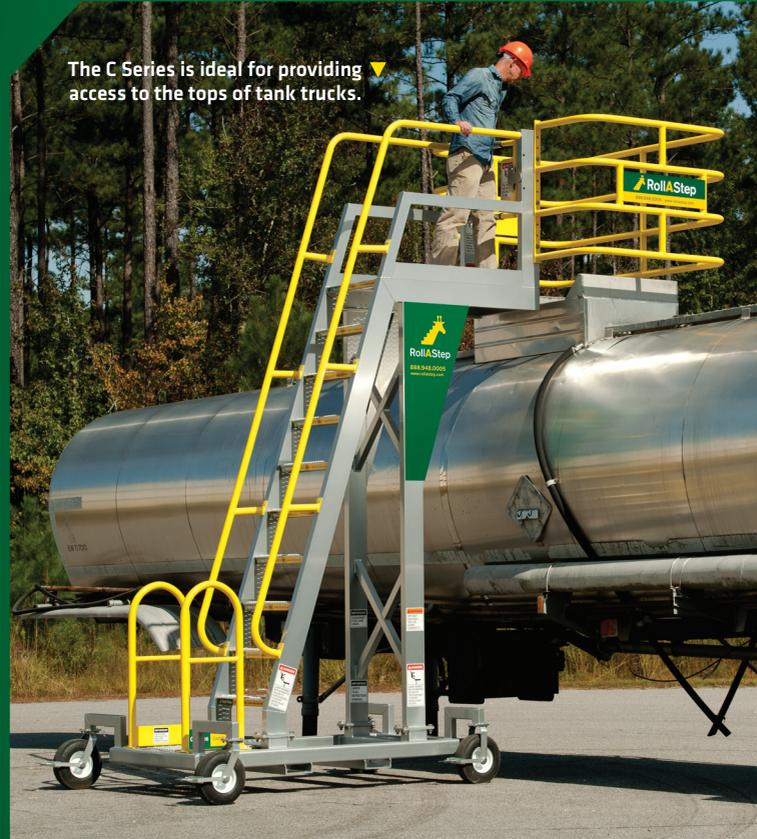

The C Series is ideal for providing access to the tops of tank trucks.



The self supported cantilevered platform extends 2'-5" beyond the wheel base.

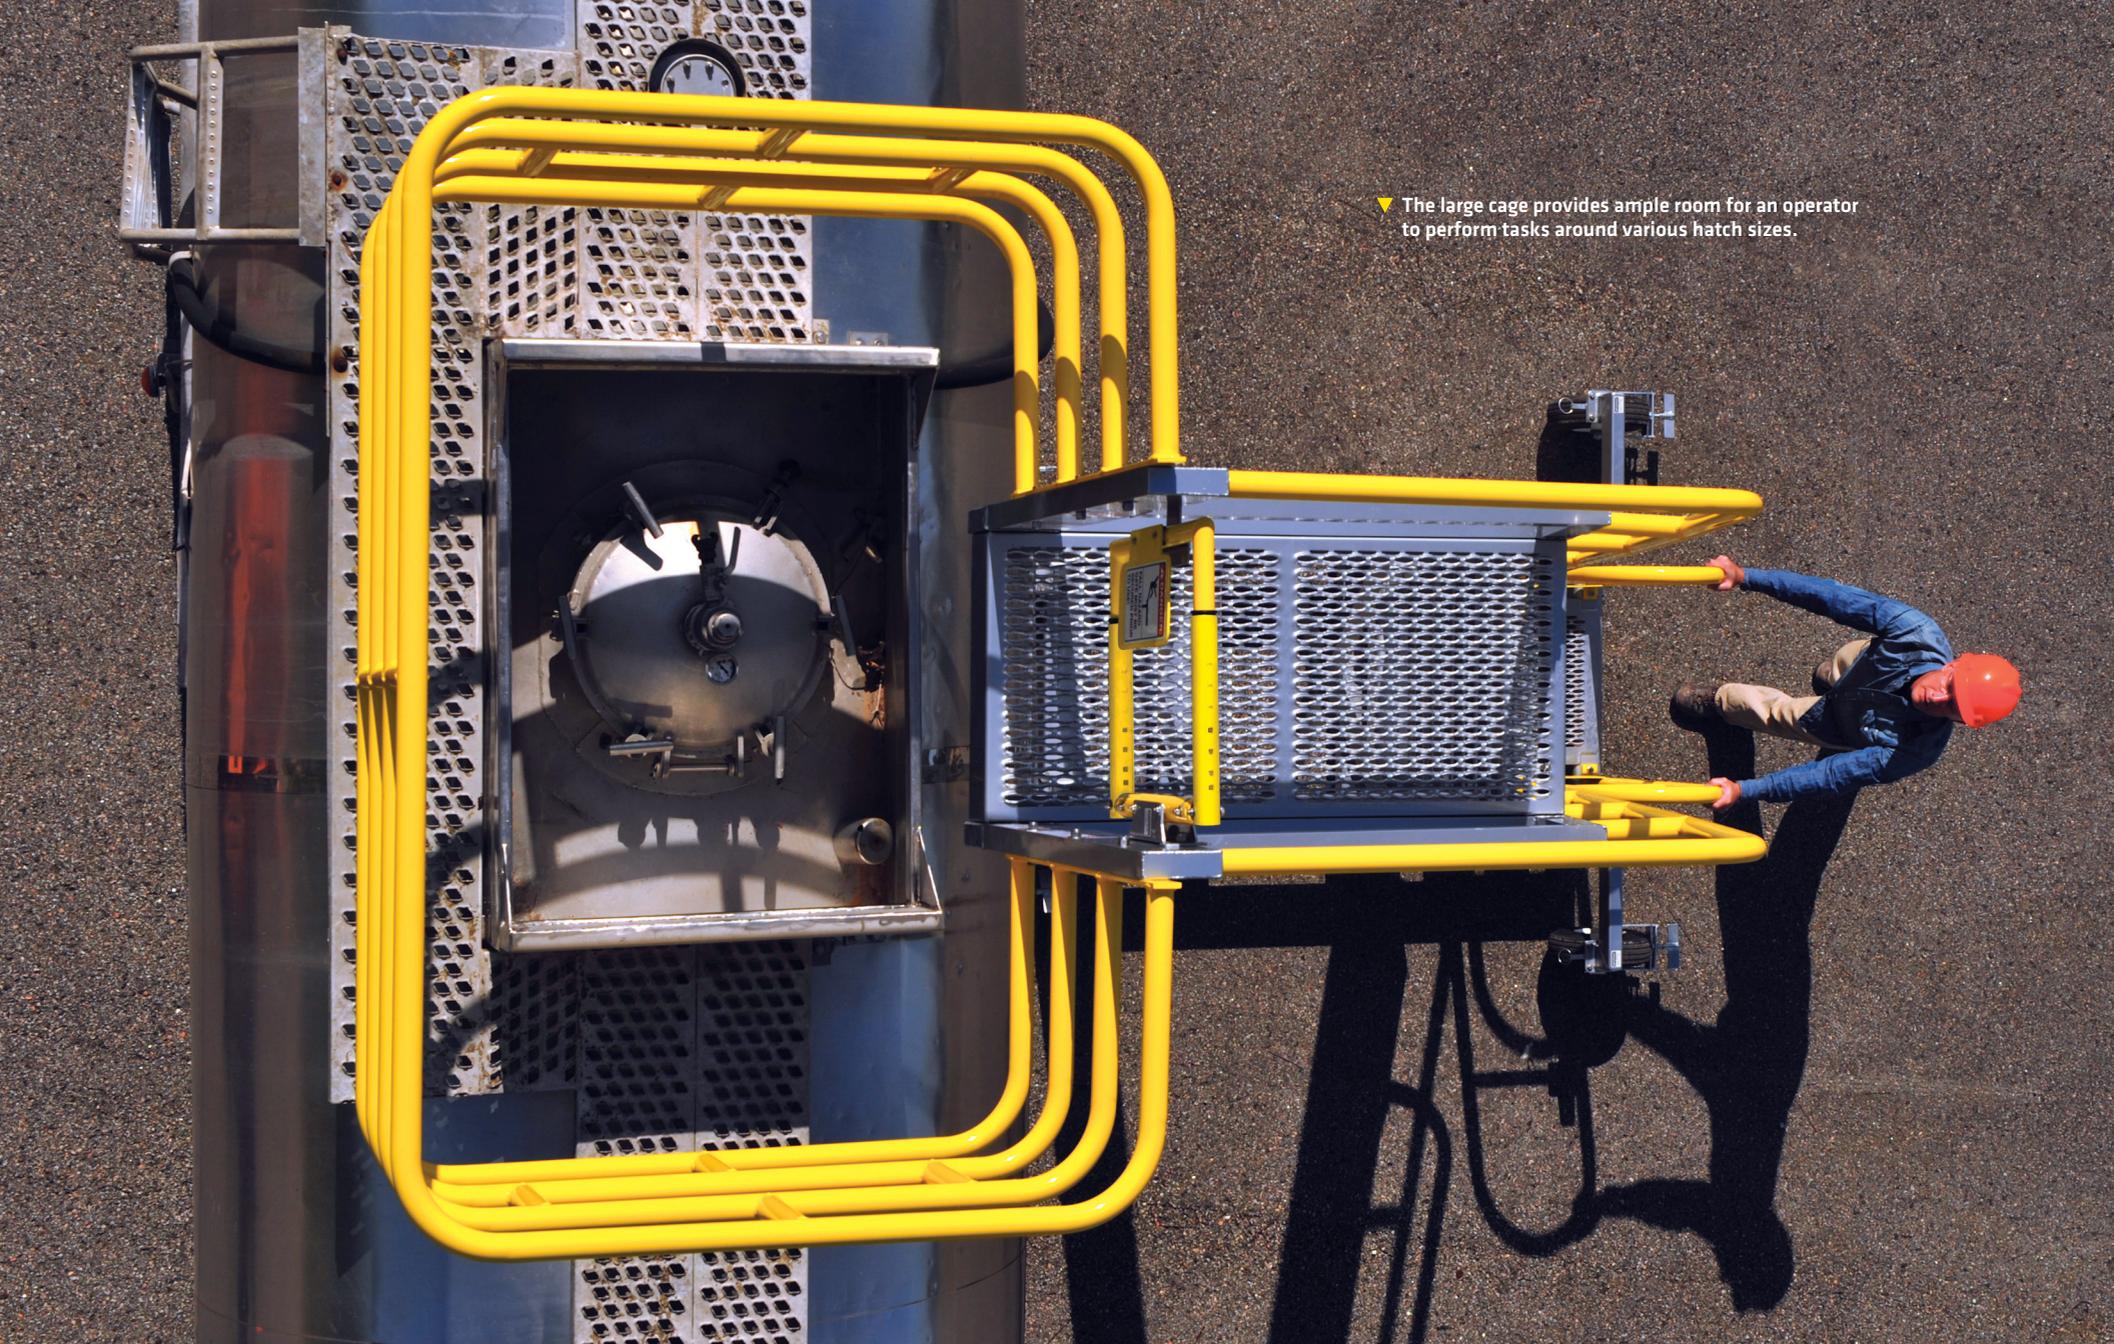

The large cage provides ample room for an operator to perform tasks around various hatch sizes.



Zacatepetl 363 A, Delegación Tlalpan 14010  
México, D.F. Tel- +52 (55) 5606-1611, e-mail:  
promtec@promtec.com.mx

call us toll free **888.948.0005**

visit us online **www.rollastep.com**

### Adjustable Height Anywhere You Want It

The G Series is a variable height, self-leveling platform. Its 24" wide steps and six square foot platform self level to present a safe walk and work surface throughout its working range.

The aluminum upper, galvanized steel base and stainless hardware is built to last, both indoors and out.

Includes Patent #7,950,095B2.  
Other patents pending.



**Patsy**  
Customer Service



Self-supporting  
platform



Gas springs for easy  
height adjustment.

Stairs and  
platform self-level  
at any height.

### Adjustable Height

The G Series adjusts height with the removal of a single locking pin.

The gas springs provide assistance in raising the platform, while gentle downward pressure lowers the platform.

Replace the locking pin at the desired height and the stair is ready for use.



▲ Six sq. ft. work area provides room for an operator and equipment.



360° swivel  
castors allow  
precise placement.

▲ The wide steel base provides excellent stability.

Self-supporting platform ▼  
protects fragile equipment



Work at the correct ▼  
height for the job



# MP Series | Mobile Work Platform

*The workspace of a fixed platform with the benefit of mobility.*

### Built like a fixed platform

The MP Series is a highly mobile work platform designed to bring the user to the level of the work with an unparalleled level of confidence and safety. The powder-coated handrails, full size 45° rise stair stringer, and standard width and depth steps meet OSHA specifications for mobile platforms. The lightweight aluminum construction and single user maneuverability ensure the MP will be a favorite and likely the 'Go-to' workhorse of any facility.

### Mobility

The MP Series is easily maneuvered by a single operator and the 360° swiveling casters allow precise positioning.

Locking casters prevent both swivel and roll, while the soft no-flat tires roll easily over asphalt and gravel.



Annette  
Customer Service



### Configurability

Optional removable handrails give the MP series mobile platform unparalleled versatility.


Remove the cantilever end handrail to access an area over an obstruction, or remove an entire side to access a flatbed trailer.

Each handrail slides securely into and out of its retaining sleeve without tools, allowing operators to reconfigure the platform in the field.

Full sized stairs allow users to operate as if on a fixed platform.



# MP Series | Mobile Work Platform

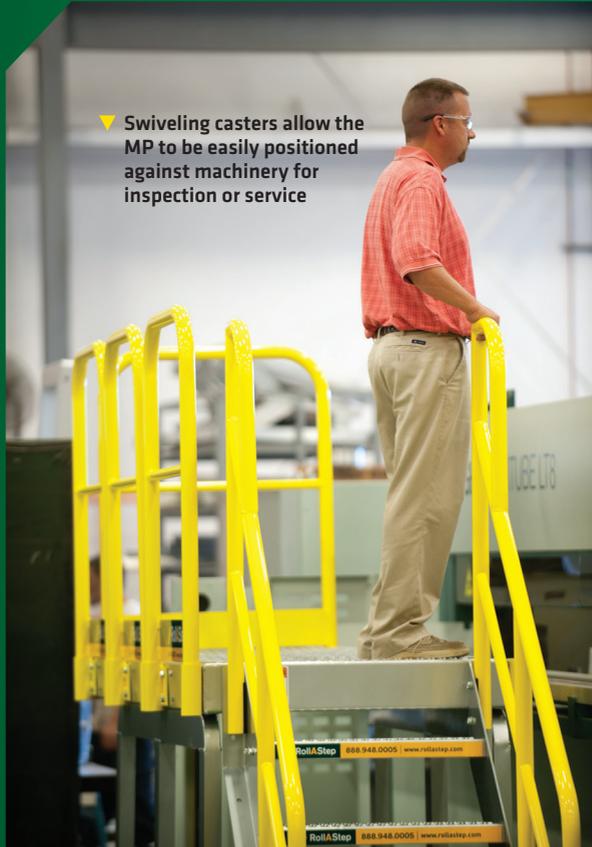

▼ Swiveling casters allow the MP to be easily positioned against machinery for inspection or service



▼ The 5 stair MP Series is the perfect tool for loading and unloading trucks.



▲ With all aluminum construction and powder coated handrails RollAStep is built to last – both indoors and out.

call us toll free **888.948.0005**

visit us online [www.rollastep.com](http://www.rollastep.com)



Zacatepetl 363 A, Delegación Tlalpan 14010  
México, D.F. Tel- +52 (55) 5606-1611, e-mail:  
[promtec@promtec.com.mx](mailto:promtec@promtec.com.mx)

# TR Series | Mobile Process Workstand



300lb  
Load Limit

## Made for work Designed for safety

We designed our tilt and roll with room to get the job done, wherever it may be. The six square foot platform is large enough for an operator, tools and parts, with room to spare. The lightweight frame and unique side rolling wheels make this rolling platform highly mobile and easy to position in tight spaces.



Heather  
Receptionist



Full size, powder coated handrails.



Six square feet of work area is roomy enough for an operator, tools and parts.

## Built for Safety

The TR Series is anything but a standard stick-built rolling ladder.

- Full-size handrails
- Wide base and stairs
- Aggressive tread
- 42" Handrail and midrail
- Full toeboard

The sturdy aluminum construction supports a 300lb load limit without sacrificing mobility.



The unique side rolling casters make the TR Series easy to position in tight areas.



# TR Series | Mobile Process Workstand



◀ The additional platform area brings a new level of safety to warehousing tasks.



▶ The wide base provides additional stability.



▶ The TR Series is designed with the stability and work area to get the job done.

call us toll free **888.948.0005**

visit us online **www.rollastep.com**



Zacatepetl 363 A, Delegación Tlalpan 14010  
México, D.F. Tel- +52 (55) 5606-1611, e-mail:  
promtec@promtec.com.mx

## C Series

### Cantilever Rolling Platform






## G Series

### Self-Leveling Stair & Work Platform

The C Series is available in sizes ranging from 7 to 11 steps. Use the chart below to determine specifications for each size.

For more detailed drawings visit: [RollAStep.com](http://RollAStep.com)

Series Name	A (Ft)
C8	8
C9	9
C10	10
C11	11
C12	12

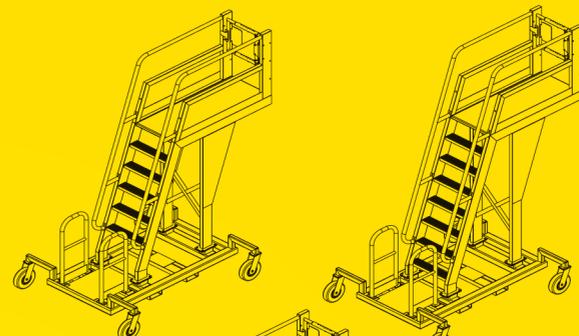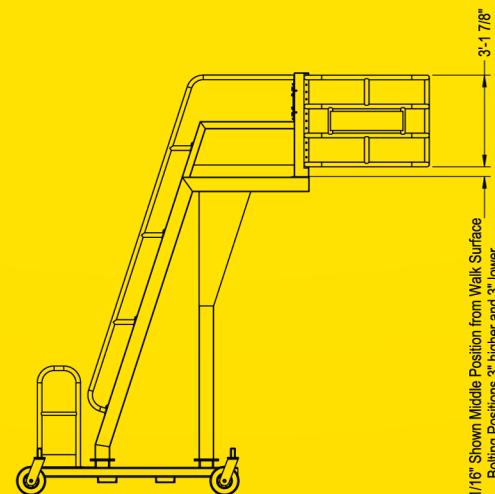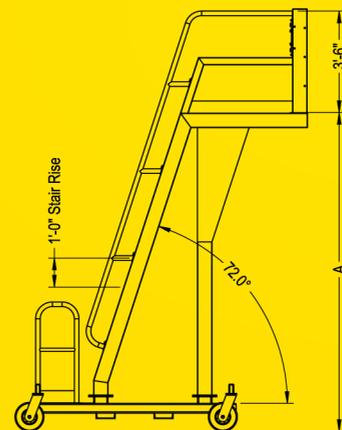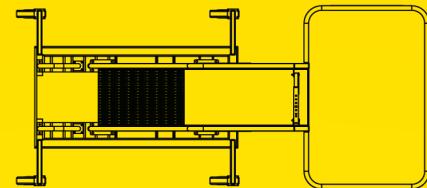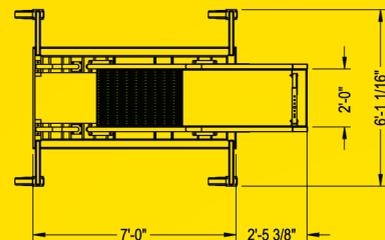

RollAStep-C Series (8ft)


RollAStep-C Series (9ft)





RollAStep-C Series (10ft)



RollAStep-C Series (11ft)

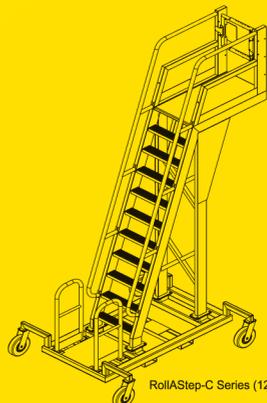

RollAStep-C Series (12ft)

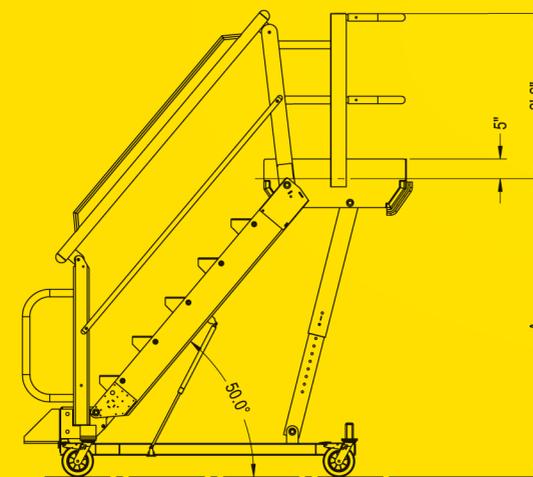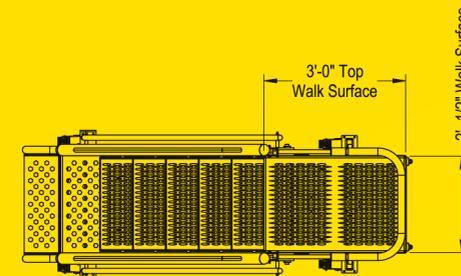

G Series - 7



G Series - 7



G Series - 8



G Series - 9



G Series - 10

The G Series is available in sizes ranging from 7 to 10 steps. Use the chart below to determine specifications for each size.

For more detailed drawings visit: [RollAStep.com](http://RollAStep.com)

G Series Model	A (in)
G Series - 7	75 13/16"
G Series - 8	85 13/16"
G Series - 9	95 3/4"
G Series - 10	105 11/16"






## MP Series | Mobile Work Platform

## TR Series | Mobile Process Workstand

The MP Series is available in sizes ranging from 2 to 7 steps. Use the chart below to determine specifications for each size.

For more detailed drawings visit: [RollAStep.com](http://RollAStep.com)

	A (in)	B (in)
MP-27	27	122.375
MP-36	36	131.375
MP-45	45	140.375
MP-54	54	149.375
MP-63	63	158.375
MP-72	72	167.375

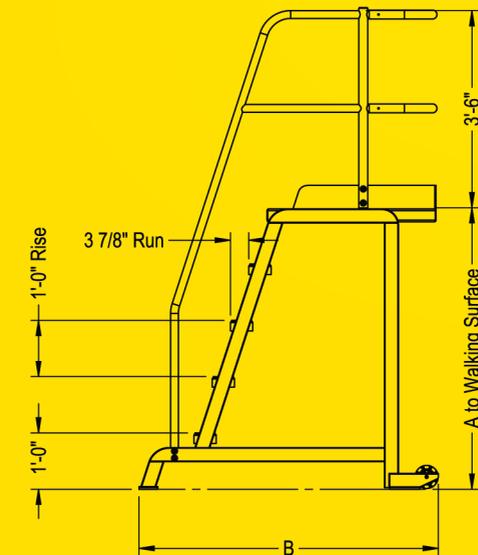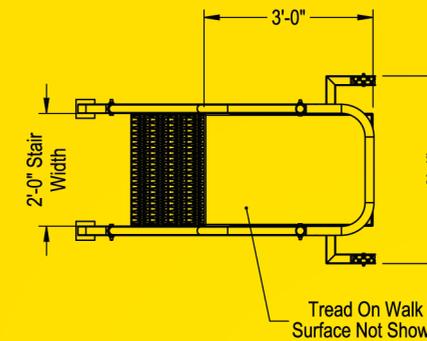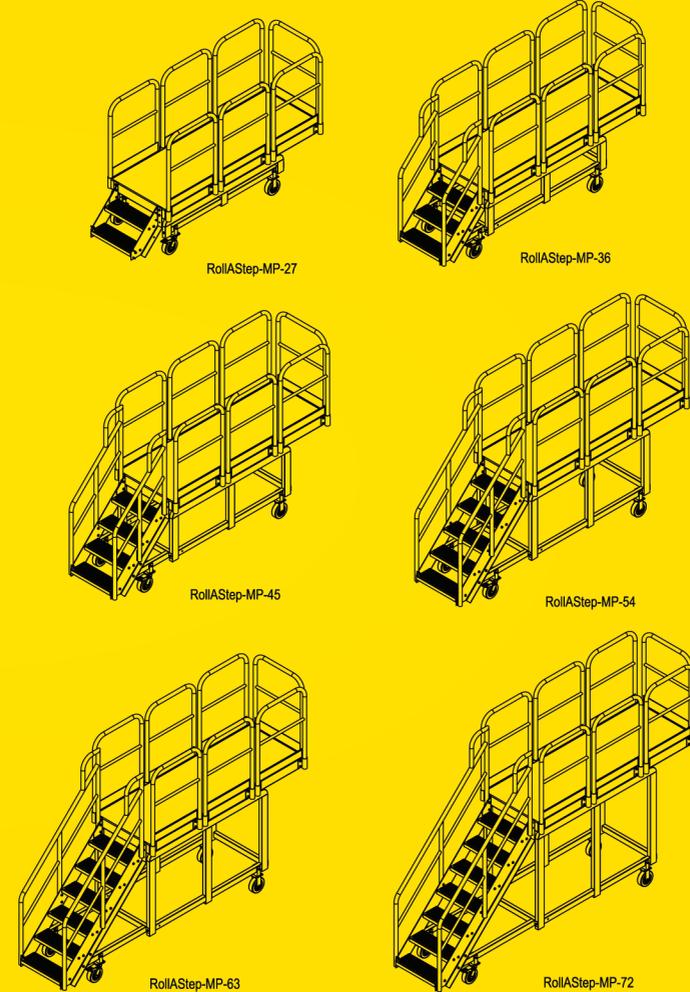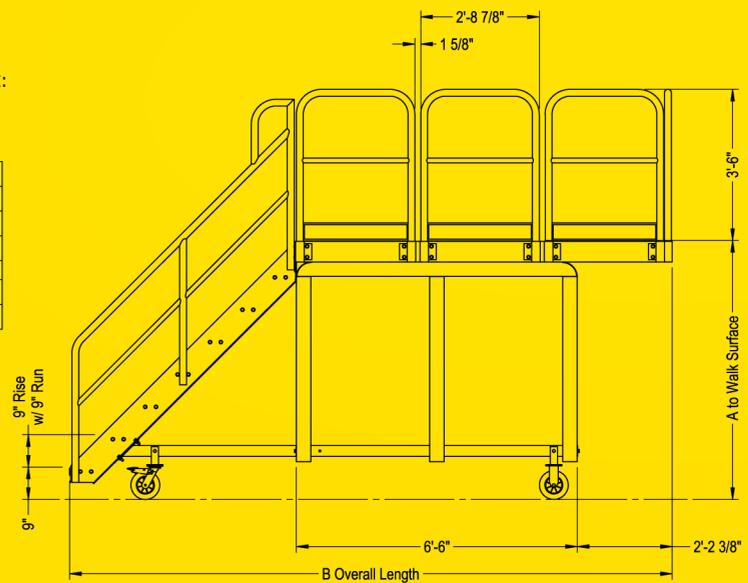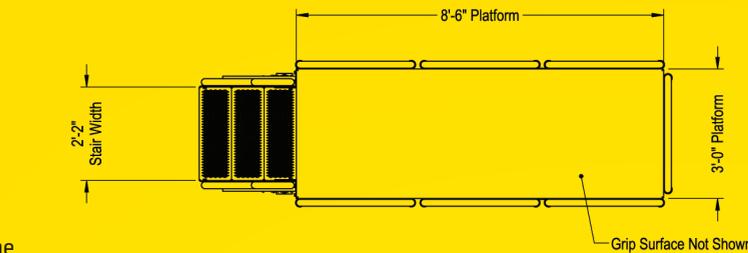

The TR Series is available in sizes ranging from 1 to 5 steps. Use the chart below to determine specifications for each size.

For more detailed drawings visit: [RollAStep.com](http://RollAStep.com)

	A (in)	B (in)
TiltNRoll-24	24	52
TiltNRoll-36	36	55 15/16
TiltNRoll-48	48	59 7/8
TiltNRoll-60	60	63 13/16
TiltNRoll-72	72	67 3/4





YellowGate's twenty inches of adjustability, field-reversible swing direction and universal mounting system protects every passageway, with one SKU.

Simply count the number of openings where fall protection is required and place your order - no time consuming tracking of measurements or mounting types required and no costly returns due to ordering the wrong size or swing.

Each gate is field adjustable for both length and swing direction with a single wrench. The universal mounting system mounts to walls, angle iron and round pipe or square tube with no additional parts to order.



888.663.0015  
www.yellowgate.com

# One Gate. Fits All. Stops Falls.

Simplify compliance with one gate

Built to last, outdoors and in.



Universal mount - no additional parts to order.

IMPORTANT  
ADHERE TO ALL  
INSTRUCTIONS  
IN MANUAL



Zacatepetl 363 A, Delegación Tlalpan 14010  
México, D.F. Tel- +52 (55) 5606-1611, e-mail:  
promtec@promtec.com.mx

## Universal Mount

The universal mount's parallel and perpendicular mounting capabilities meet any installation requirement, no additional parts required.



Parallel mount



Perpendicular mount



Field-adjustable length from 16 to 36 inches with a single wrench.



This open-ended 24" wide platform terminus is now protected from falls.



The Malbec Tensioner eliminates the need for a swing gate's most common failure point, the spring. The patent pending system provides field adjustable tension and maintenance free closure, every time.


YellowGate can swing either in or out by simply relocating two bolts.




**888.663.0015**  
[www.yellowgate.com](http://www.yellowgate.com)

## Patent Pending Malbec Tensioner

No spring to fail

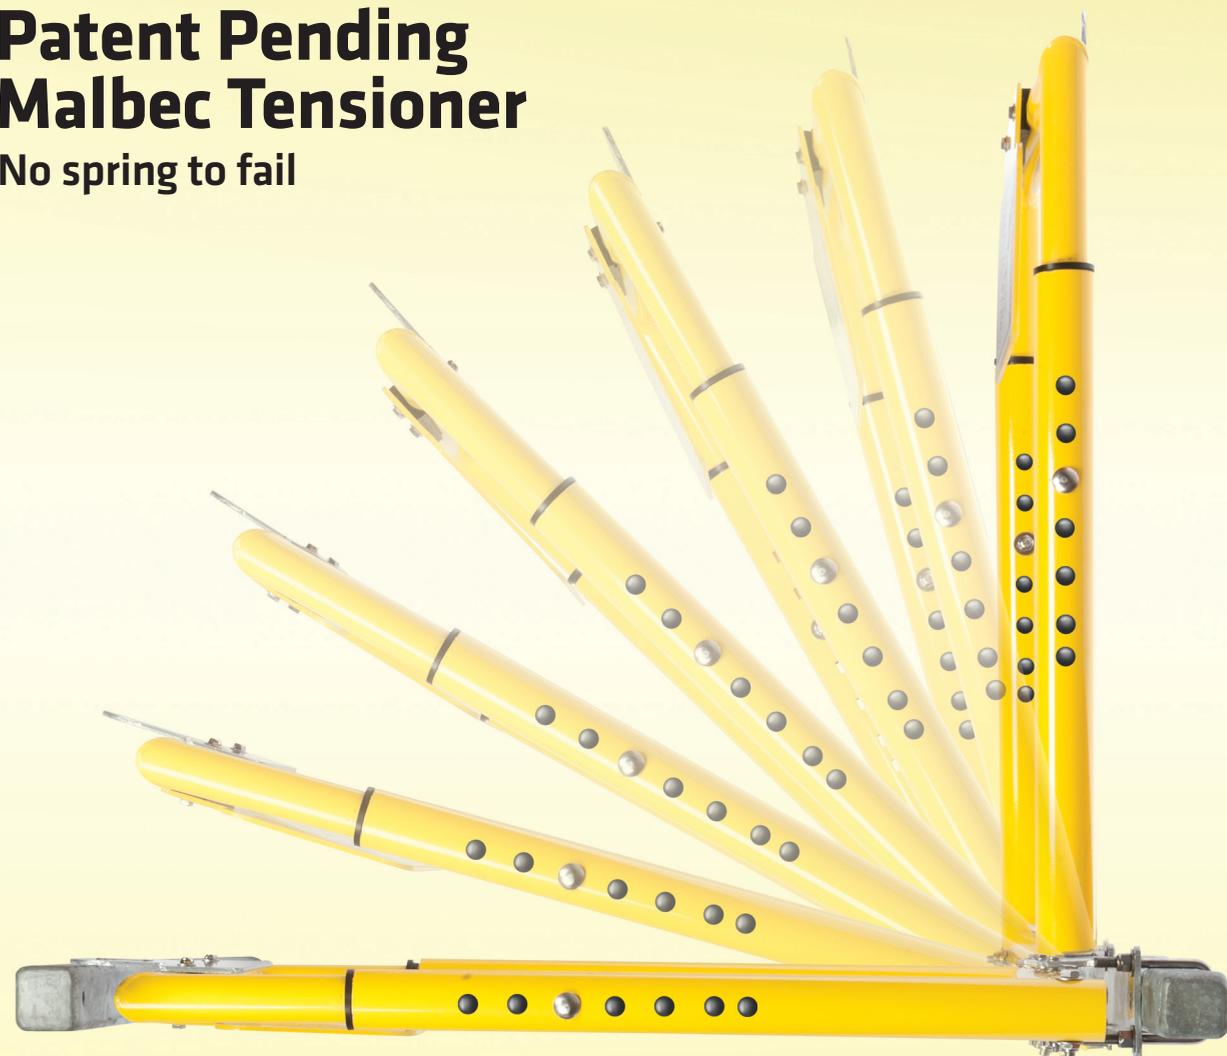

Zacatepetl 363 A, Delegación Tlalpan 14010  
 México, D.F. Tel- +52 (55) 5606-1611, e-mail:  
[promtec@promtec.com.mx](mailto:promtec@promtec.com.mx)

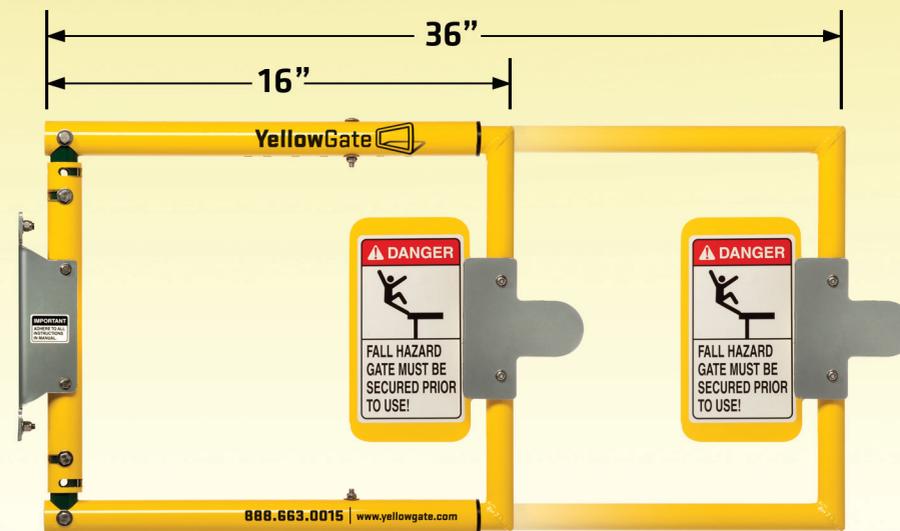

## The Most Adjustable Swing Gate Available

Easily adjusts from 16" wide to 36"

Minimum width of YellowGate unit: 16" in perpendicular configuration, 19.5" in parallel configuration.




### OSHA Regulation

**1910.23 Guarding Floor & Wall Openings & Holes**

- (a) Protection of floor openings
- (a.2) Guard ladderway floor openings or platforms like a stairway floor opening with passage through the railing either provided with a swinging gate or offset so a person cannot walk directly into the opening.

### Universal Mount – Mounts anywhere, no additional parts required

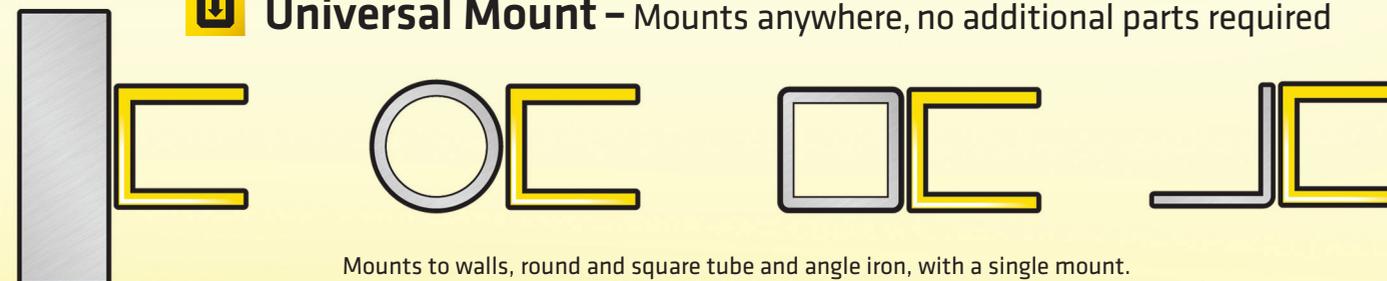

Mounts to walls, round and square tube and angle iron, with a single mount.