


- *Models with over 30,000 in/lbs of lifting capacity!!*
- Super Smooth, lightweight operation through a full 95° range of movement.
- Easy to adjust with standard hand tools, with the arm in any position, unsupported
- Spring cylinder is bolted to the arm for quick removal.
- The shaft is Stainless Steel and the welded steel housing encloses a minimum of two compression springs for safety.
- The spring cylinder is not welded to the arm. which allows it to be replaced in the field if

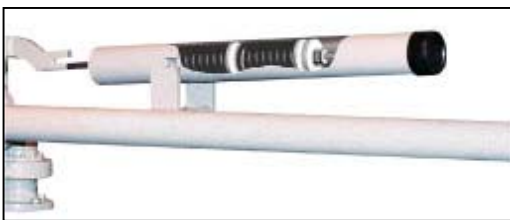

- Cylinder is mounted above or to the side of the primary giving full access around the base and the rear of the loading arm.